




## ADS® Qstart™ Installation, Setup, and Collection

Qstart is a simple, user-friendly software utility that allows you to quickly setup and activate ADS TRITON+®, FlowShark® Triton, FlowShark®, ECHO™, RainAlert III™, and IETG FlowHawk™ monitors. Qstart also enables you to collect and review monitor data in hydrograph and tabular views simultaneously. An end-of-day Archive feature “zips-up” the modified data files and stores them in folders for easy import into other software packages. See below for the quick and easy steps to getting your ADS monitors up and running.


### Qstart Software Installation:

To download Qstart, customers may go to the ADS website at [www.adsenv.com/softwaredownloads](http://www.adsenv.com/softwaredownloads). Follow the instructions in the **Qstart Installation Guide** to download and install Qstart. Once installed, double-click on the Qstart icon on your desktop screen to launch Qstart. Upon initial launch, a **Settings** screen will display:

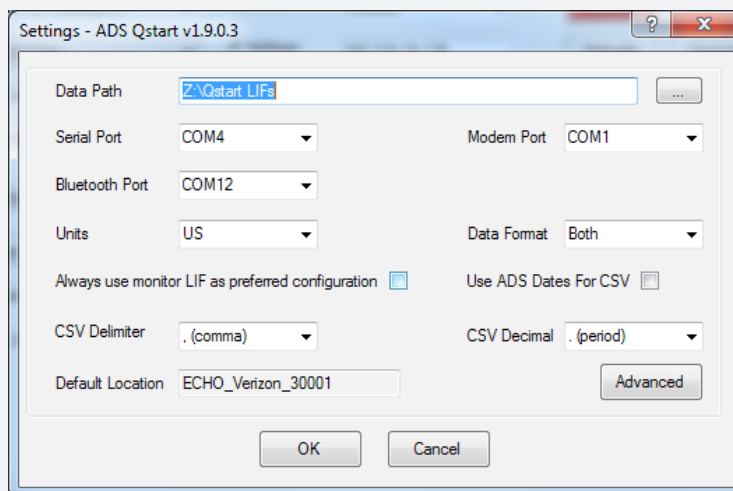

Enter or browse to the desired *Data Path* for your site folders, and then select the correct *Serial* and *Modem* ports for your computer, the desired *Units* of measure for your data, the *Data Format* for the collected data, and the desired *CSV Delimiter* and *CSV Decimal*, if applicable. Also select the *Use ADS Dates for CSV* checkbox. Then, click on . You are now ready to set up and activate your ADS monitors!

### Qstart Main Screen:

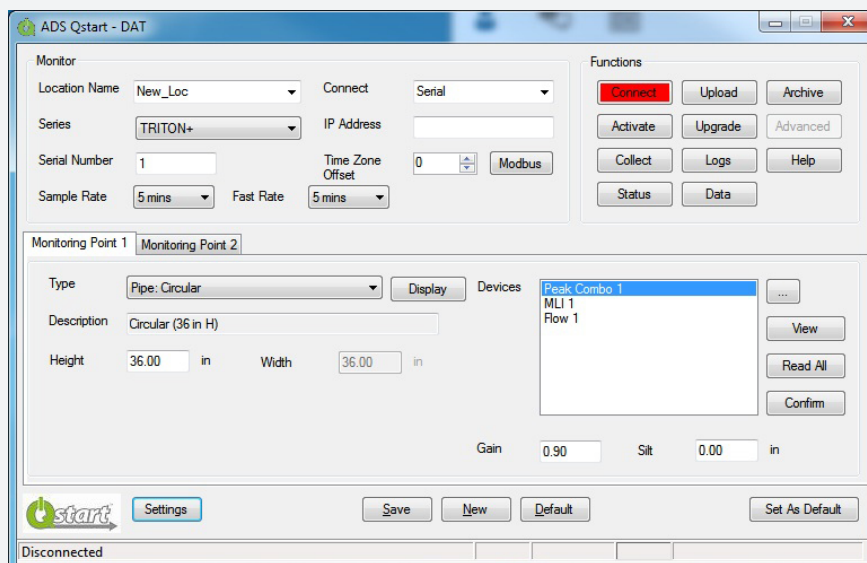

## Qstart Initial Setup:

ADS recommends setting up a default Location Information File (LIF) that you can use as a template for all subsequent monitor locations. Enter a logical name for the default location in the *Location Name* field (for example, enter "Default\_Loc").

1. Select the monitor *Series* for the default location.
2. Select the communication method from the *Connect* drop-down list.
3. Enter 0 (zero) for the *Serial Number*.
4. Select the desired default *Sample Rate*.
5. Verify *Circular* is the correct pipe *Type*.
6. Verify the *Devices* list accurately represents the devices to be used on the current project. Update as necessary from the *Available Devices* by clicking on the  button. Select the *Flow 1* or *Flow 2* (for Monitoring Point 2) device and configure appropriately if you want to include flow

rate in the collected Qstart data. Qstart does not calculate flow rate; therefore, the monitor must be configured to log this entity.

7. Update each device with the appropriate parameters by selecting the device and clicking on the  button.
8. Once setup is complete, click on  and then  to create the new *default* location with your project-specific default parameters.


## Qstart New Location Setup and Activation:

1. Click on .
2. Update the *Location Name* field with the desired name for the location you are configuring. Refer to the online help for the specific naming conventions.
3. Enter the *Serial Number* of the monitor to be installed.
4. Update the pipe *Height* and *Width* as necessary.
5. Update the device parameters as necessary by selecting the device and clicking on the  button.

6. Once the parameters are updated, click on  and then . Qstart will call and activate the monitor.
7. Click on  when activation is complete.

## Qstart Data Collection and Data Display:

1. Click on  to upload data from the monitor.
2. Verify the specified date range to collect, and click on . Qstart will collect the data and automatically display the data in both hydrograph and tabular format.
3. Click on  when the data collection and review process is complete.
4. To view historical data from a location, click on , verify the date range is correct, and click on .

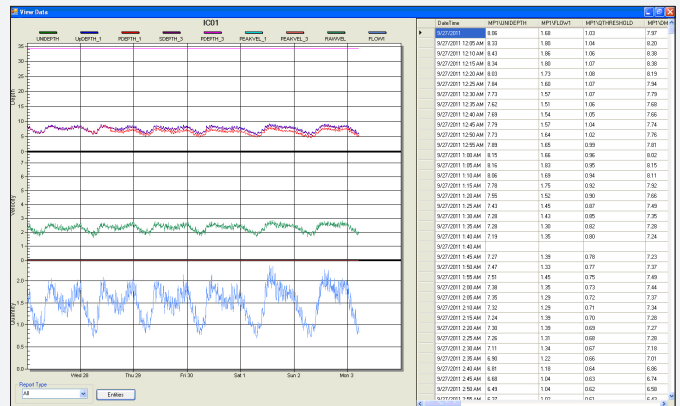

## Qstart Diagnostics:

Qstart provides three diagnostic functions:

1. Click on  to review the operational integrity of the monitor.
2. Click on  to obtain instantaneous readings of all configured sensors.

3. Click on  and then  (once connected) to access the sensor diagnostic capabilities. Highlight the desired *Device* on which you want to perform diagnostics and then click on  to obtain access to the device dialog of the individual sensor for which you want to take diagnostic readings.

## Qstart Archive:

At the end of the day, when all the data has been collected, click on . Qstart will archive the data, the updated log files, and any changes in the LIF to a zipped file in your location directory folder for retrieval into the software package of your choice. The files will contain .CSV and/or ADS bin files, depending on the initial **Settings** configured.

## Qstart Support:

Online Help for Qstart is available by clicking on the  button on Qstart's main screen. It provides in-depth descriptions of each Qstart function and should answer most questions that may arise while using the Qstart software. Contact [adssupportcenter@idexcorp.com](mailto:adssupportcenter@idexcorp.com) if you have additional questions about ADS' newest software utility.

