

Scattergraph Principles and Practice

Characterization of Sanitary Sewer and Combined Sewer Overflows

Kevin L. Enfinger, P.E. and Patrick L. Stevens, P.E.

ADS Environmental Services

340 The Bridge Street, Suite 204 | Huntsville, Alabama 35806 | www.adsenv.com/scattergraph

ABSTRACT

Sewer overflows pose a significant threat to public health and the environment, contributing to beach closures, contamination of drinking water, and other concerns. Knowing when and where they occur – as well as their duration, volume, and frequency – are important pieces of information needed to assess their impact and minimize their future occurrence.

Sewer overflows are readily identified by evaluating flow monitor data on a scattergraph. Practical examples from flow monitor locations throughout the United States are provided, demonstrating the scattergraph signatures of sanitary sewer overflows (SSOs) and combined sewer overflows (CSOs) under various conditions. Techniques are also developed to estimate their duration and volume from flow monitor data under certain conditions.

KEY WORDS

Flow Monitoring, CSO, Scattergraph, SSO

Introduction

Sewer overflows pose a significant threat to public health and the environment, contributing to beach closures, contamination of drinking water, and other concerns. Knowing when and where they occur – as well as their duration, volume, and frequency – are important pieces of information needed to assess their impact and minimize their future occurrence.


Sewer overflows are readily identified by evaluating flow monitor data on a scattergraph. The scattergraph is a graphical tool that displays flow depth and velocity data from a sewer flow monitor. The resulting patterns form characteristic signatures that reveal important information about conditions within a sewer.¹ Scattergraph signatures for sewer overflows have been previously reported by Stevens and Sands.² The scattergraph signatures of sanitary sewer overflows (SSOs) and combined sewer overflows (CSOs) are further discussed in this paper, along with techniques to estimate their duration and volume from flow monitor data under certain conditions.

Sanitary Sewer Overflows

A sanitary sewer overflow (SSO) is a discharge of untreated wastewater from a sanitary sewer system. According to the Environmental Protection Agency (EPA), SSOs are caused by a variety of reasons – including inadequate sewer design and construction, insufficient operation and maintenance, power failures, and vandalism.³ These situations are often compounded by infiltration and inflow – contributing to an increase in the duration, volume, and/or frequency of overflow events.

Regardless of the contributing factors, sewers often experience a common sequence of hydraulic events prior to an SSO – including uniform flow, backwater, and surcharge conditions. Profile views depicting this sequence are provided in Figure 1.


FIGURE 1: Prelude to an SSO – a Profile View

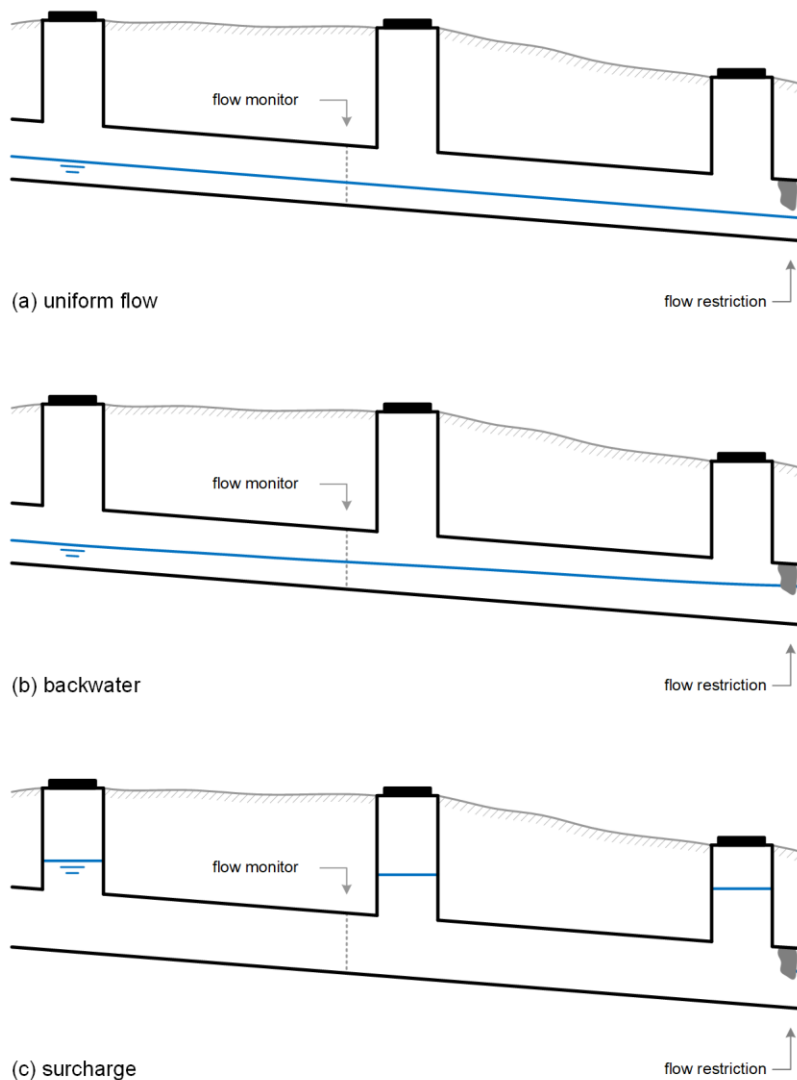

Sanitary Sewer Overflow from an Upstream Manhole


The scattergraph signature of an SSO depends on the type of overflow and its position relative to a flow monitor. A profile view of an SSO that occurs at a manhole located upstream from a flow monitor is shown in Figure 3.

FIGURE 3: Profile View of an SSO from an Upstream Manhole

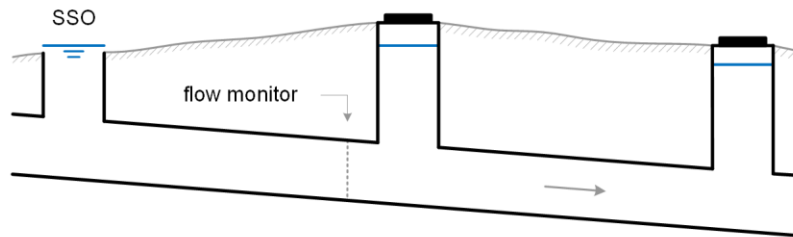

This SSO is identified on a scattergraph by a cluster of surcharge data points at a constant flow depth and a constant velocity, as shown in Figure 4. The depth reported by the flow monitor during the SSO is controlled by the overflow elevation, and the velocity is controlled by the operational capacity of the downstream sewer.

FIGURE 4: Scattergraph of an SSO from an Upstream Manhole

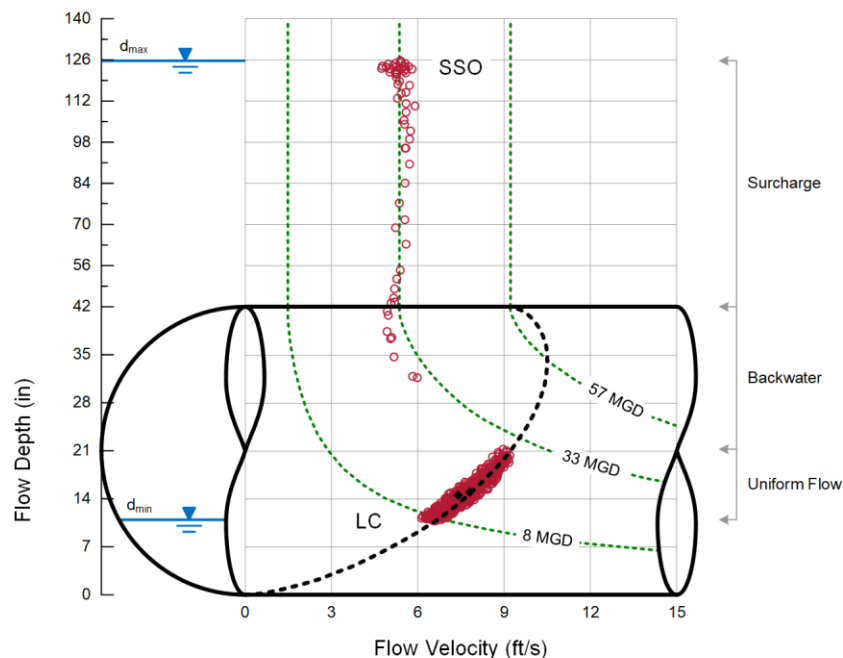


Based on the scattergraph, the operational capacity of this sewer is 33 MGD – only 58% of the expected capacity under uniform flow conditions. However, surcharge conditions are observed up to a flow depth of nearly 126 inches, resulting in an SSO upstream from the flow monitor.

Sanitary Sewer Overflow from a Downstream Manhole


The scattergraph signature of a downstream SSO can also be identified. A profile view of an SSO that occurs at a manhole located downstream from a flow monitor is shown in Figure 5.

FIGURE 5: Profile View of an SSO from a Downstream Manhole

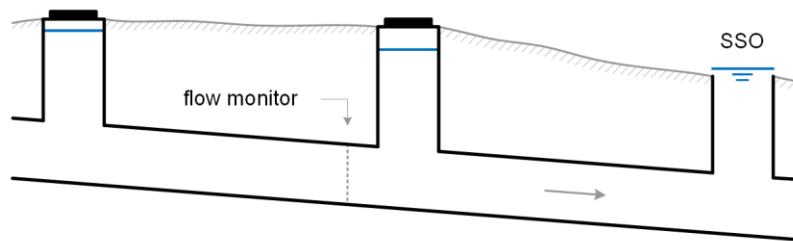

Both upstream and downstream SSOs are characterized by a constant flow depth controlled by the overflow elevation. However, the additional flow escaping the system during a downstream SSO is detected by the flow monitor as an increase in velocity during the overflow event, as shown in Figure 6.

FIGURE 6: Scattergraph of an SSO from a Downstream Manhole

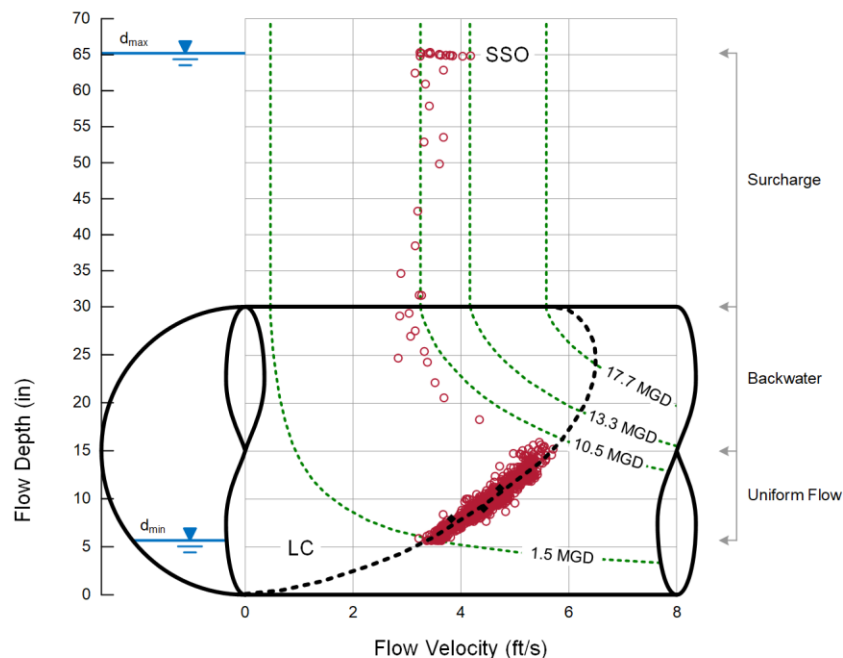


Based on the scattergraph, the operational capacity of this sewer is about 10.5 MGD – only 59% of the expected capacity under uniform flow conditions. Surcharge conditions are observed up to a flow depth of approximately 65 inches, resulting in an SSO downstream from the flow monitor. The maximum overflow rate is determined using iso-Q lines and is approximately 2.8 MGD (13.3 MGD – 10.5 MGD).

Sanitary Sewer Overflow from an Overflow Pipe


Some municipalities have SSOs from fixed points within the sewer system that overflow to a storm sewer or directly to receiving waters.³ A profile view of an SSO that occurs from an overflow pipe is shown in Figure 7.

FIGURE 7: Profile View of an SSO from an Overflow Pipe

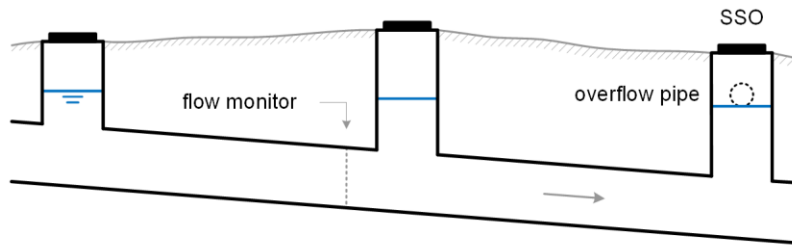

The scattergraph shown in Figure 8 is from a 10-inch sewer equipped with an 8-inch overflow pipe located in a manhole downstream from the flow monitor.

FIGURE 8: Scattergraph of an SSO from an Overflow Pipe

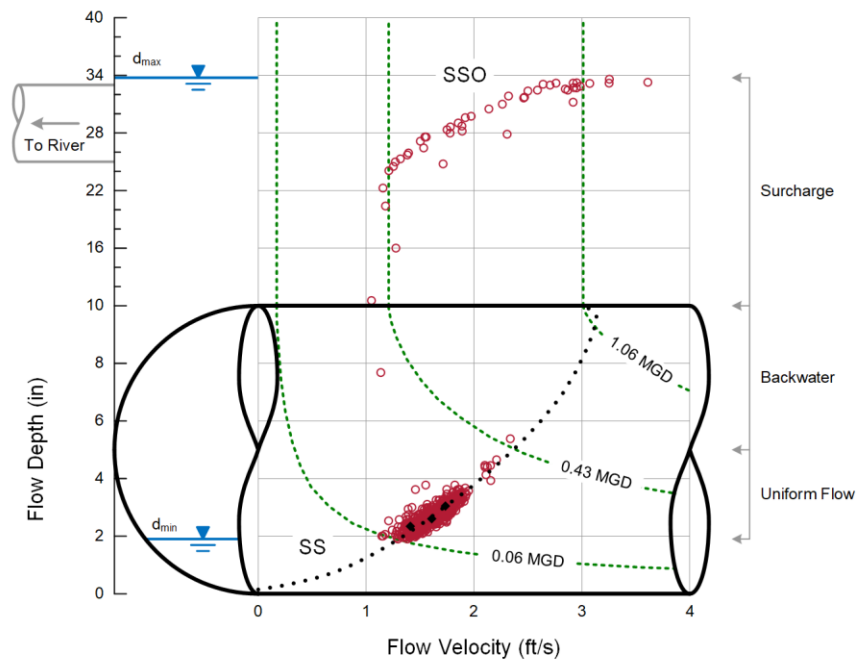


Based on the scattergraph, the operational capacity of this sewer is 0.43 MGD – only 41% of the expected capacity under uniform flow conditions. The SSO is activated at a flow depth of approximately 25 inches – the invert elevation of the 8-inch overflow pipe.

Reverse Flow


Reverse flow in a sewer system is rare but can occur in certain situations. A profile view of reverse flow is shown in Figure 9.

FIGURE 9: Profile View of Reverse Flow

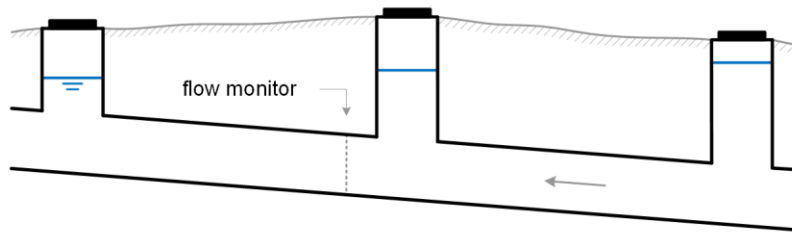

The scattergraph shown in Figure 10 is from a 12-inch sewer that is *overpowered* by a much larger downstream interceptor.

FIGURE 10: Scattergraph of Reverse Flow

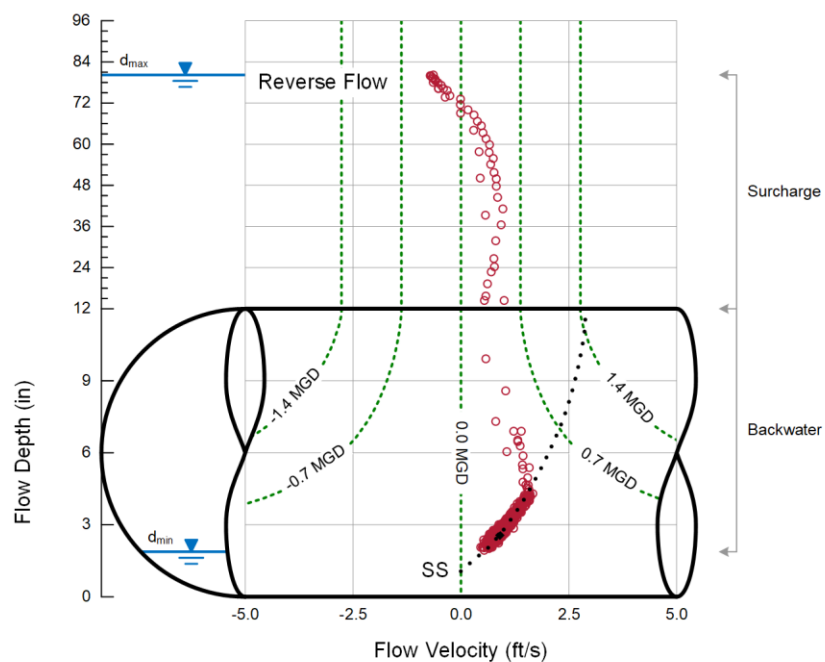

During a rain event, this sewer experiences backwater and surcharge conditions as shown on the scattergraph. However, note the sequence of events that occurs during surcharge conditions. The flow rate begins to slow down at about 42 inches and eventually comes to a momentary stop at 72 inches. Reverse flow is observed above this depth and may have led to an SSO.

Combined Sewer Overflows


A combined sewer overflow (CSO) is a discharge of untreated wastewater from a combined sewer system, most often occurring at a CSO regulator designed for this purpose. CSOs generally occur during wet weather events, when the combined flow rate of wastewater and storm water exceeds the capacity that a regulator structure is configured to convey to the WWTP.³ Excess flows are discharged to receiving waters.

Most combined sewers experience a common sequence of hydraulic events prior to a CSO, based on the design of the CSO regulator. Those equipped with end weirs or side weirs often generate backwater conditions in the incoming sewer, and once the backwater depth reaches the weir elevation, a CSO occurs. This sequence of hydraulic events leaves a distinct pattern that can be identified on a scattergraph of flow depth and velocity data. The scattergraph signatures of CSOs from regulator structures equipped with end weirs or side weirs are discussed in the following sections.

Combined Sewer Overflow from an End Weir


Some CSO regulators are equipped with an end weir that is constructed perpendicular to the incoming wastewater flow. Dry weather flow is diverted to the WWTP. However, once the flow depth exceeds the weir height, additional flow is carried over the weir and is discharged to the receiving water. A plan view of a CSO regulator equipped with an end weir is shown in Figure 11.

FIGURE 11: Plan View of a CSO Regulator with an End Weir

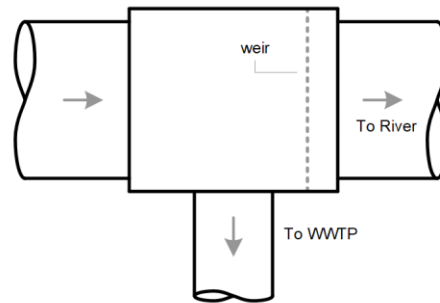

The scattergraph shown in Figure 12 displays data from a flow monitor installed in a 30-inch sewer located just upstream from a CSO regulator equipped with an end weir.

FIGURE 12: Scattergraph of a CSO from an End Weir

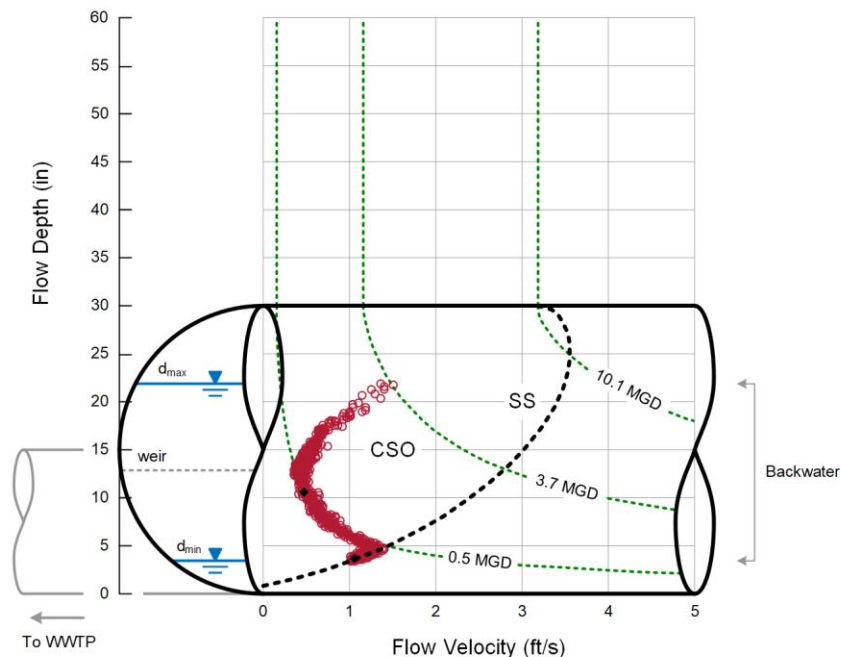


Dry weather flows are diverted to the WWTP through a 15-inch sewer. Based on the scattergraph, the 15-inch sewer conveys flows up to 0.5 MGD to the WWTP, and the CSO is activated at a weir elevation of 13 inches.

Combined Sewer Overflow from a Side Weir


Some CSO regulators are equipped with a side weir that is constructed along the side of the incoming sewer. Dry weather flows are funneled into a smaller sewer and continue to the WWTP. However, once the flow depth exceeds the weir height, additional flow is carried over the side weir and is discharged to the receiving water. A plan view of a CSO regulator equipped with a side weir is shown in Figure 13.

FIGURE 13: Plan View of a CSO Regulator with a Side Weir

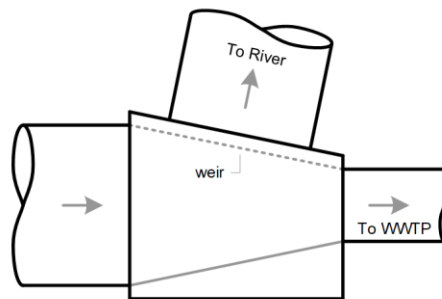

The scattergraph shown in Figure 14 displays data from a flow monitor installed in a 120-inch sewer located just upstream from a CSO regulator equipped with a side weir.

FIGURE 14: Scattergraph of a CSO from a Side Weir

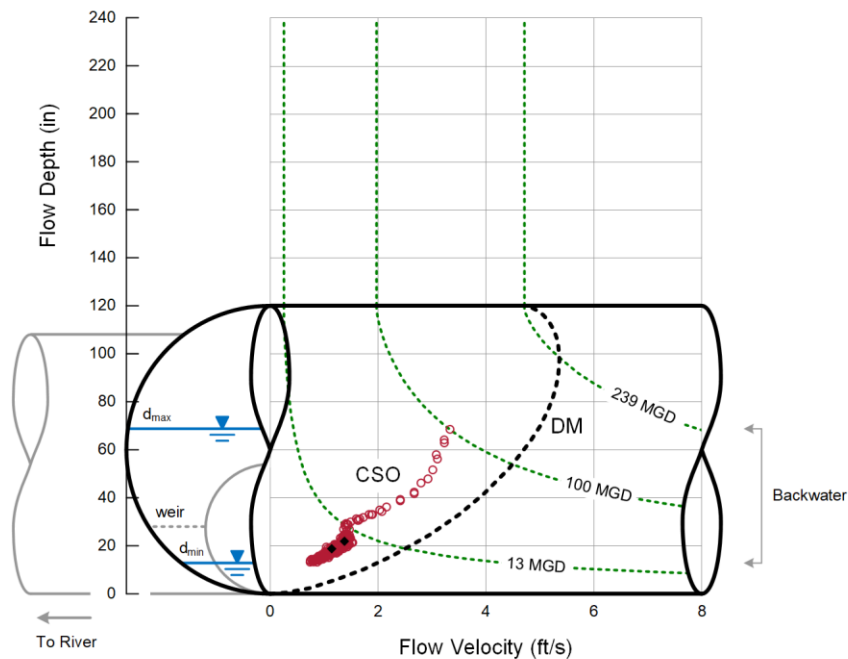

Dry weather flows are funneled to the WWTP through a 54-inch sewer. Based on the scattergraph, the 54-inch sewer conveys flows up to 13 MGD to the WWTP, and the CSO is activated at a weir elevation of approximately 27 inches.

Overflow Duration and Volume

Once the signature of an SSO has been identified on a scattergraph and the flow depth (d_0) and flow rate (Q_0) at the onset of the overflow have been determined, the overflow duration and volume can be estimated from flow monitor data. Procedures for estimating these parameters are described in the following sections.

Overflow Duration

The overflow duration (t_{OF}) is calculated by determining the number of recorded flow monitor readings where $d > d_0$ and multiplying by the sample period between readings, as shown in Equation (1).

$$t_{OF} = nT \quad (1)$$

where: t_{OF} = overflow duration, min
 n = number of flow monitor readings where $d > d_0$
 T = sample period, min

Overflow Volume

The overflow volume (V_{OF}) is calculated using Equations (2) through (4). These three equations can also be algebraically rearranged and condensed into one equation as shown in Equation (5).

$$Q_{OF_i} = Q_i - Q_0 \quad (2)$$

$$V_{OF_i} = Q_{OF_i}T \quad (3)$$

$$V_{OF} = \sum_{i=1}^n V_{OF_i} \quad (4)$$

$$V_{OF} = \sum_{i=1}^n (Q_i - Q_0)T \quad (5)$$

where: Q_{OF_i} = overflow rate at time $t = i$, gpm
 Q_i = flow rate at time $t = i$, gpm
 Q_0 = flow rate at onset of overflow, gpm
 V_{OF_i} = overflow volume at time $t = i$, gal
 T = sample period, min
 V_{OF} = total overflow volume, gal
 i = iteration 1 to n
 n = number of flow monitor readings where $d > d_0$

An example is provided to demonstrate this procedure.

EXAMPLE


Flow monitor data from a 12-inch sewer are plotted on a scattergraph and suggest that an SSO has occurred downstream from the monitor location.

- (a) Use the scattergraph provided below to determine the flow depth (d_0) and the flow rate (Q_0) at the onset of overflow.
- (b) Use the tabular data provided on the following page to estimate the duration and volume of the downstream SSO.

Solution

- (a) A downstream SSO is characterized by an increase in flow velocity at a constant surcharge depth. Based on the scattergraph provided, this increase occurs at a flow depth of 81 inches. Therefore, $d_0 = 81$ inches.

Using the iso-Q lines provided on the scattergraph, this SSO begins when the sewer flow rate exceeds 0.82 MGD. Therefore, $Q_0 = 0.82$ MGD.

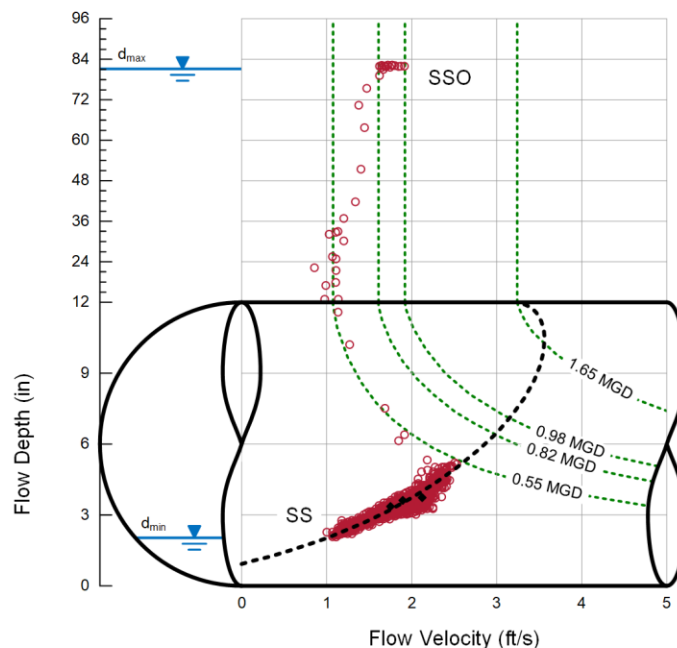

- (b) Based on the flow depth (d) data provided on the next page, the SSO begins on 03/20 at 18:00 when the flow depth rises above d_0 (81 inches). The flow depth remains above d_0 until 03/21 at 02:00 — an overflow duration of about 8 hours.

Based on the flow rate (Q) data provided on the next page, calculate the overflow rate (Q_{OFI}) for each flow monitor reading using Equation 2. Convert the units to gpm, and determine the overflow volume (V_{OFI}) using Equation 3 where $T = 15$ minutes. Add the overflow volumes for each flow monitor reading to determine the total overflow volume (V_{OF}) using Equation 4. The overflow volume for this SSO is about 20,000 gal.

EXAMPLE

	date	time	d	v	Q	Q _{OF}	Q _{OF}	V _{OF}
	mm/dd	hh:mm	in	ft/s	MGD	MGD	gpm	gal
SSO begins when the flow depth rises above d ₀ (81 inches)	03/20	17:00	12.77	0.98	0.498	0.000	0.00	0
	03/20	17:15	33.09	1.14	0.579	0.000	0.00	0
	03/20	17:30	70.29	1.38	0.701	0.000	0.00	0
	03/20	17:45	80.90	1.67	0.848	0.000	0.00	0
	03/20	18:00	81.79	1.62	0.822	0.002	1.70	25
	03/20	18:15	82.01	1.62	0.822	0.002	1.70	25
	03/20	18:30	82.01	1.62	0.822	0.002	1.70	25
	03/20	18:45	82.04	1.63	0.828	0.008	5.22	78
	03/20	19:00	82.06	1.64	0.833	0.013	8.75	131
	03/20	19:15	81.97	1.65	0.838	0.018	12.27	184
Flow monitor data is obtained at a sample period (T) equal to 15 minutes	03/20	19:30	81.94	1.65	0.838	0.018	12.27	184
	03/20	19:45	81.77	1.88	0.954	0.134	93.36	1,400
	03/20	20:00	81.47	1.75	0.888	0.068	47.53	713
	03/20	20:15	81.28	1.65	0.838	0.018	12.27	184
	03/20	20:30	80.88	1.68	0.853	0.033	22.85	343
	03/20	20:45	82.19	1.67	0.848	0.028	19.32	290
	03/20	21:00	82.15	1.66	0.843	0.023	15.80	237
	03/20	21:15	82.19	1.65	0.838	0.018	12.27	184
	03/20	21:30	82.22	1.65	0.838	0.018	12.27	184
	03/20	21:45	82.17	1.78	0.904	0.084	58.11	872
Peak overflow rate (Q _{OF}) is 107.46 gpm	03/20	22:00	82.11	1.65	0.838	0.018	12.27	184
	03/20	22:15	82.16	1.72	0.873	0.053	36.95	554
	03/20	22:30	82.18	1.78	0.904	0.084	58.11	872
	03/20	22:45	82.12	1.82	0.924	0.104	72.21	1,083
	03/20	23:00	82.04	1.62	0.822	0.002	1.70	25
	03/20	23:15	81.97	1.72	0.873	0.053	36.95	554
	03/20	23:30	82.00	1.78	0.904	0.084	58.11	872
	03/20	23:45	82.09	1.88	0.954	0.134	93.36	1,400
	03/21	00:00	82.12	1.85	0.939	0.119	82.79	1,242
	03/21	00:15	82.07	1.88	0.954	0.134	93.36	1,400
SSO ends when the flow depth drops below d ₀ (81 inches)	03/21	00:30	81.97	1.92	0.975	0.155	107.46	1,612
	03/21	00:45	81.97	1.88	0.954	0.134	93.36	1,400
	03/21	01:00	81.88	1.88	0.954	0.134	93.36	1,400
	03/21	01:15	81.80	1.88	0.954	0.134	93.36	1,400
	03/21	01:30	81.71	1.72	0.873	0.053	36.95	554
	03/21	01:45	81.52	1.68	0.853	0.033	22.85	343
	03/21	02:00	79.18	1.62	0.822	0.000	0.00	0
	03/21	02:15	75.29	1.48	0.751	0.000	0.00	0
	03/21	02:30	63.66	1.45	0.736	0.000	0.00	0
							19,958	Overflow volume is about 20,000 gal

Overflow duration is
about 8 hours

Overflow volume is
about 20,000 gal

Limitations

The calculation procedures described here are best applied to SSOs that are located downstream from a flow monitor when backwater conditions are experienced prior to an overflow event. The overflow duration can also be estimated for SSOs that occur upstream from a flow monitor; however, the overflow volume cannot be determined using these procedures. The calculation procedure, as shown here, should not be applied to CSOs without additional details to properly characterize any flow split between flows directed to the WWTP and to the CSO for flow depths greater than the weir elevation.

Overflow duration and volume estimates obtained using this method are a function of the quality and repeatability of the flow monitor data on which they are based. If data are missing during portions of an overflow event, the application of this method is compromised. The sample rate at which the data are obtained is also a factor. The accuracy of overflow duration and volume estimates increases as the sample rate of the flow monitor increases.

Conclusion

Sewer overflows are readily identified by evaluating flow monitor data on a scattergraph. Scattergraph signatures of sewer overflows under various hydraulic conditions have been presented in this paper, along with techniques to estimate their duration and volume from flow monitor data under certain conditions. These methods provide important pieces of information needed to assess the impact of sewer overflows and minimize their future occurrence.

Symbols and Notation

The following symbols and notation are used in this paper:

VARIABLES

d = flow depth, in or ft
 v = flow velocity, ft/s
 Q = flow rate, ft³/s, MGD, or gpm
 V = volume, gal
 T = sample period, min
 n = number of flow monitor readings
where $d > d_0$

SUBSCRIPTS

0 = onset of overflow
 OF = overflow
 i = iteration 1 to n

Acknowledgement

The authors acknowledge Paul Mitchell and Jim Schutzbach for their feedback and review during the preparation of this paper. Their input is greatly appreciated.

References

1. Enfinger, K.L. and Keefe, P.N. (2004). "Scattergraph Principles and Practice – Building a Better View of Flow Monitor Data," KY-TN Water Environment Association Water Professionals Conference; Nashville, TN.
2. Stevens, P.L. and Sands, H.M. (1995). "Sanitary Sewer Overflows Leave Telltale Signs in Depth-Velocity Scattergraphs," *Seminar Publication – National Conference on Sanitary Sewer Overflows*; EPA/625/R-96/007; Washington, D.C.
3. EPA CSO/SSO Report to Congress (2004). *Impacts and Control of CSOs and SSOs*, EPA/833/R-04/001; Washington, D.C.
4. Enfinger, K.L. and Kimbrough, H.R. (2004). "Scattergraph Principles and Practice – A Comparison of Various Applications of the Manning Equation," *Proceedings of the Pipeline Division Specialty Conference*; San Diego, CA; American Society of Civil Engineers: Reston, VA.
5. Enfinger, K.L. and Stevens, P.L. (2006). "Scattergraph Principles and Practice – Tools and Techniques to Evaluate Sewer Capacity," *Proceedings of the Pipeline Division Specialty Conference*; Chicago, IL; American Society of Civil Engineers: Reston, VA.

This technical paper was first presented on July 10, 2007 at the American Society of Civil Engineers Pipelines 2007 Conference held in Boston, MA and can be referenced as shown below.

Enfinger, K.L. and Stevens, P.L. (2007). "Scattergraph Principles and Practice – Characterization of Sanitary Sewer and Combined Sewer Overflows," *Proceedings of the Pipeline Division Specialty Conference*; Boston, MA; American Society of Civil Engineers: Reston, VA.